



reliable vehicle data



**REMOTE**  
Vehicle Data Collection Device

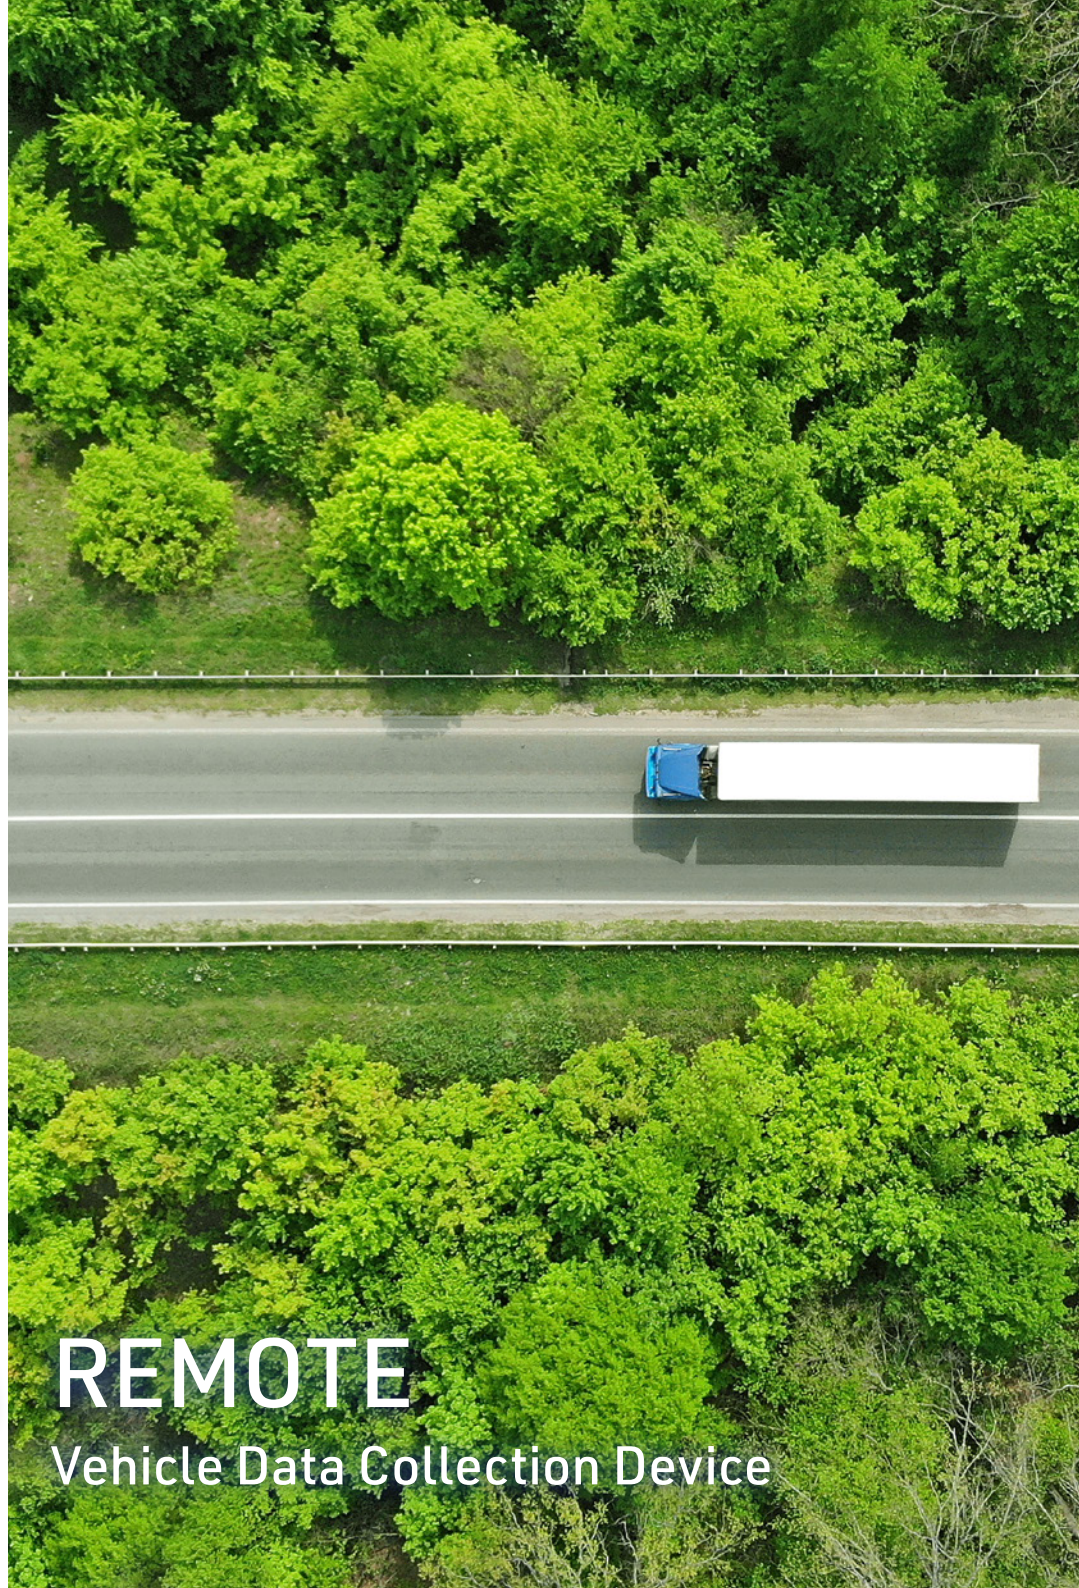

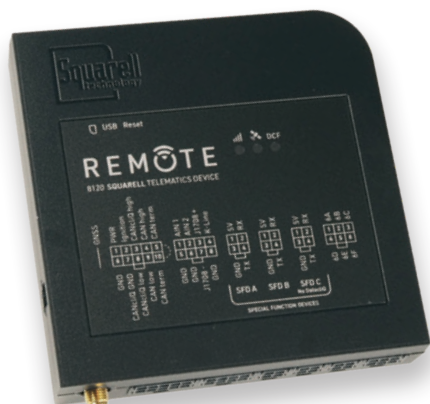

USB Reset

REMOTE

8170 SQUIBELL TECHNIQUES SERVICE

GNSS  
GND PWR Ignition  
CANclig GND CANclig high  
CANclig low CAN high  
CAN low CAN term

AIN 1  
AIN 2  
J1708 +  
K-Line

GND  
GND  
J1708 -  
GND

5V  
TX  
RX

5V  
TX  
RX

5V  
TX  
RX

5V  
TX  
RX

5V  
TX  
RX

5V  
TX  
RX

5V  
TX  
RX

5V  
TX  
RX

5V  
TX  
RX

5V  
TX  
RX

5V  
TX  
RX

5V  
TX  
RX

5V  
TX  
RX

5V  
TX  
RX

5V  
TX  
RX

5V  
TX  
RX

5V  
TX  
RX

5V  
TX  
RX

5V  
TX  
RX

## What is the REMOTE?

A state of the art One Box Solution **designed for automotive use** according to ISO 7637-2.

The REMOTE is a small box equipped with a Modem, GNSS/ GPS, G-sensor and RTC. It can handle all vehicle networks and has three Special Function Device ports (SFD) available.

### Reliable Vehicle Data


For more than 20 years Squarell has been the Vehicle Data Specialist. Our Engineers unravel CAN bus **protocols of all vehicle brands**.

We currently have more than 450 parameters available, found on the networks in vehicles or developed for customer application.

The REMOTE generates data that can be used for vehicle **Performance, Maintenance, Safety, Liability, Environment and Diagnostics**.

### Application Area

Our devices are used in different market segments such as: Trucks and Trailers, Vans, First Response Vehicles, Military Vehicles, Money Transport, Garbage Trucks and many other areas of application.

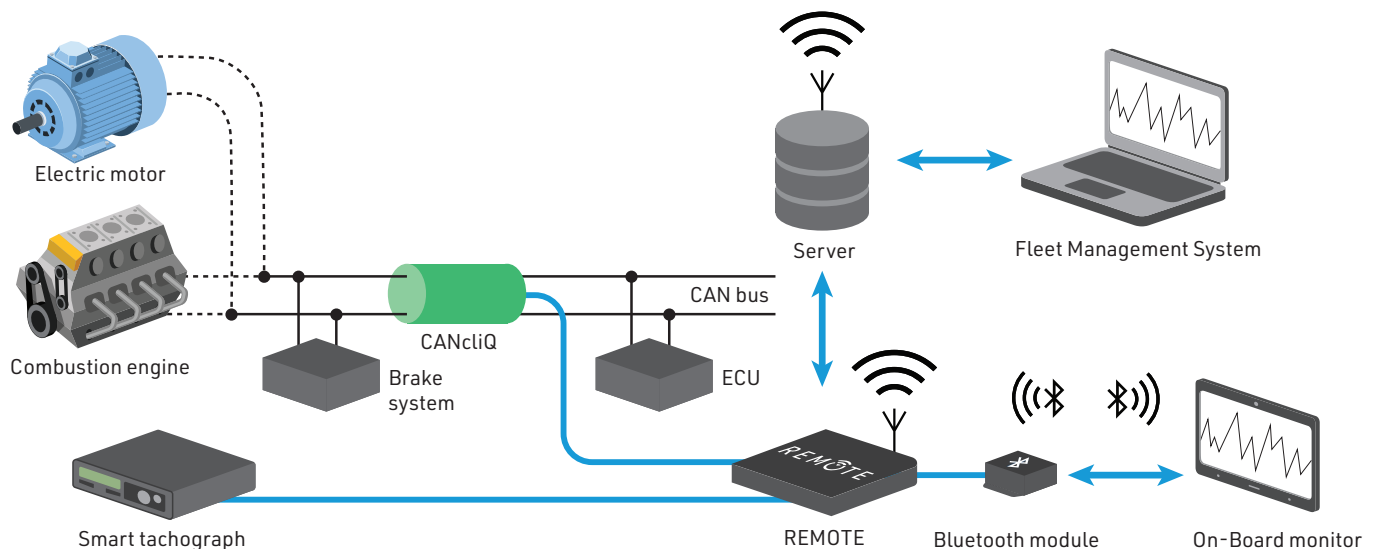

## Possible Vehicle Network Connections

- 2 Hardwired/CANcliQ's and 2 DatacliQ **CAN bus** connections with automatic baud rate detection, up to 1000 Kbaud (including 667 Kbaud), Internal 120R terminator connection for CAN port 2.
- 1 Hardwired and 1 DatacliQ **J1708** Vehicle Network connection.
- 1 Hardwired **K-line** Vehicle network connection with Slow and Fast initialisation.

**We read directly from the vehicle networks** and OBD, a brand specific FMS device is not required.

CAN networks, Power and Ignition are accessible via one 10-pole Molex Micro-fit connector, the K-line, J1708 and the analogue inputs are available via one 8-pole Molex Micro-Fit connector on the front of the device.

## Vehicle Protocols

For CAN bus we support J1939, ISO11992, NMEA 2000 and **all manufacturer** specific communication protocols. For J1708 the J1587 and J1922 protocols are available. For K-line the ISO 9141 and ISO 14230 variants are available. Connect the ISO11992 Trailer CAN bus via a DataCliQ on SFD port A or B.

## Micro B USB Port

The Micro-B USB port can be used to upload software into the device. When this USB port is connected to a **Fleet management Tablet**, the REMOTE represents itself as a Serial port under DCF control.

## Analogue Input Ports

**2 analogue inputs** can measure analogue signals up to 30 VDC with a 1 mV resolution or can be used to read **2 digital input signals**. The sample rate is 10 ms.

## Wireless Network Connections

The Modem of the REMOTE has a 2G band for GSM 850 and 900 MHz and DCS 1800, PCS 1900 MHz and also a 4G LTE-M band with 2G fall-back. The REMOTE switches **automatically** to the alternative band when the present network fails. The modem antenna is built-in.

## Wireless Network Protocols

The user can select 3 communication protocols for the REMOTE: **TCP, MQTT and HTTPS**.

TCP and MQTT are more commonly used but we have implemented the HTTPS protocol for high security applications such as military vehicles and money transport vehicles.

## Data transmission

The user can select the envelope mode for data transport, the data transmission is than **more efficient**. For the data transmission a 4 MB data buffer is available. Due to the combination of both features a lot of data can be stored for a long period of time and accelerated the Tacho Download significantly.

## SIM card

A Nano SIM card can be inserted on the top of the device.

## Global Navigation Satellite System (GNSS)

The GNSS receiver in the REMOTE is designed to receive signals from different satellite systems like GPS, GLONASS, Beidou and Galileo. For a good location reception, the antenna must be placed outside the vehicle.

The location data rate in the REMOTE depends on the speed and movement of the vehicle. Our algorithm ensures **high accuracy** on the map at a **low data transmission rate!**



## Second Micro Processor Unit

In addition to the standard DCF processor, the REMOTE has a second MPU. The versatile configuration, the different communication protocols, the data transmission envelopes and the wake-up, sleep and deep sleep states are handled by this MPU. A smart helper.

## Sleep and Wake-up

The REMOTE is able to sleep and still monitor the CAN bus for activity, it can even be in deep sleep and still be awakened by motion or time to perform a task.

## Real Time Clock

The Real Time Clock has its own battery that keeps the RTC active during power off or sleep mode. The REMOTE can be **woken** at a time or a **time interval**. The RTC will synchronise on Google NTP.

## Accelerometer

The REMOTE has a 3-axis accelerometer that can detect movements of the device (in a vehicle or trailer) for theft detection.

Even in deep sleep mode the REMOTE can wake-up on movements and send a warning to the home base.

## Special Function Devices (SFD)

On the 3 SFD ports several Special Function Devices can be connected like the DatacliQ, the Driver Awareness Panel (DAP), the Power Output Module (POM) but can also be used internally by the extension board. For example an RS-232 port. The SFD ports A, B and C are accessible via 3 Molex Micro-Fit 4-pole connectors on the front of the device.

## Power Supply acc. to ISO 6737-2

The Power Supply of the REMOTE is designed according to the automotive power supply standard ISO 6737-2.

The supply voltage range is 10 – 30 Vdc. The average power consumption is at 24Vdc **50mA**, during deep sleep mode the power consumption is 24Vdc 5mA.

## Certificates

CE, **E4**, UKCA, RoHS. According to the regulations, the REMOTE is tested once a year by a **certified body** for the E4 certificate and is therefore allowed to communicate on vehicle networks.

## Physical characteristics

The device is 100 x 100 x 20 mm and weighs 130 grams.

Due to the high requirements, -40...85 deg C, the components are **long life and automotive grade**, the housing is UL94 V-0 flame retarded and has an IP40 protection rate.

## Country of origin

The device is entirely designed and produced in the Netherlands.

## Support

A group of highly educated automotive engineers support the REMOTE with an extended manual, diagnostic and upload software iControl and FOTA. We provide a standard 2-year warranty on the REMOTE.

The manual and configuration is available by reading the **QR code** on the back side of the device.

## Firmware Over The Air (FOTA)

Squarell's FOTA system is a HTTPS API through which the REMOTE can download necessary files for updates. A FOTA session is always initiated by the REMOTE and the FOTA server responds. The connection is encrypted.

## Battery Pack

One option is an external Battery Pack.

If the REMOTE also has a monitoring task and needs to be woken up by movement or activity on the CAN bus, an external battery pack is desirable. 1, 2 or 3 x 2600 mAh cells can be connected. The REMOTE can generate 20 days heartbeats on 1 cell. This battery package is charged by the REMOTE itself.






SFD Hardware DAP



SFD Power Output Module

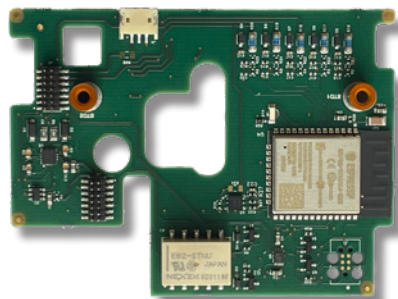

Extension board with Bluetooth 2.1, RS-232, single relay and 5 analog/digital inputs.



The Trailer Data Box: The REMOTE, Bluetooth device and a battery pack

## REMOTE Applications and add-ons

### SFD Driver Awareness Panel (DAP)

The DAP challenges the driver in an intuitive manner to improve his or her driving behaviour. It's built-in algorithms take care of driver attention loss in the long run to ensure constant safety assistance. The driving assistance is meant to gain a better, safer, cleaner and more economical way of operating your fleet.

### SFD Power Output Module (POM)

The SFD Power Output Module can be connected to an SFD port of the REMOTE. This small device contains 6 high side drivers to supply power to a camera, a relay or other electronic devices. A dedicated DCF can control these short circuit protected outputs.

### Hardware Extension Board

We have a few internal extension boards available for the REMOTE. One of them is a multipurpose board, on a customer's request we can make a combination of digital/ analogue inputs and 1-Wire, RS-232, single relay and Bluetooth.

One 6-pole Molex Micro-fit connector on the back of the device is wired to the extension board, depending on the functions used, the pins of the connector are connected.

### Trailer Data Box

Squarell has developed a Trailer Data Box with a REMOTE in it for the collection of trailer data.

The Trailer Data Box can be easily mounted and connected to the ISO CAN bus of the trailer, the truck can be recognised by its Bluetooth beacon. When the trailer is parked, the G-sensor in the box can detect movements and report this to the home base.



# REMOTE properties

DEVICE CONFIGURATION FILE (DCF)	
Configuration system	For data processing and parameter enhancement
DCF memory	320 kB

NETWORK CONNECTIVITY	
Network protocols	MQTT, TCP, HTTPS
2G bands	GSM 850 MHz, E-GSM 900 MHz, DCS 1800 MHz, PCS 1900 MHz
4G bands	LTE-M (2G fall back)
SIM	Nano-SIM
Antenna	Internal
User acknowledge	Configurable

GLOBAL NAVIGATION SATELLITE SYSTEM (GNSS)	
GNSS	GPS, GLONASS, Beidou, Galileo
Cold start sensitivity	-148 dBm
Accuracy (Open Sky)	< 2.5 m (CEP50)
Hot start	< 1 s
Cold start	< 35 s
Data rate	On changes steering angle & every 60 s and 500 m
Antenna	External active antenna
Antenna connection	SMA

CO-PROCESSOR	
	Performance enhancement
Memory	4 MB

CAN BUS	
Hardwired ports	2
Hardware protocol	CAN V 2.0a, CAN V 2.0b
Internal terminator	CAN port 2 only
Via additional cliQ	4
Baud rate	Selectable: 10 - 1000 kBd
Automatic baud rate detection	Yes
Supported protocols	J1939, ISO11992, NMEA2000, Proprietary
Default device address	240

J1708	
Hardwired port	1
Via DatacliQ	1
Baud rate	9600 Bd
Protocols	J1587, J1922, Proprietary

K-LINE	
Hardwired port	1
Baud rate	1200 - 20000 Bd
Protocols DCF selectable	ISO 9141 (FAKRA)/ISO 9141-2 (OBDII/CARB) ISO 14230-2 (KWP 2000) ISO 14230S (Swedish)
Initialisation	Slow/Fast
Message timing	Configurable, with extended response time

SPECIAL FUNCTION DEVICE PORTS (SFD)	
Ports	3
SFD supply	4.75 - 5.25 V
SFD load	100 mA per SFD, 300 mA max to all SFDs
Default baud rate	9600 Bd
Port type	UART
Signal level	CMOS

OPTIONAL SFDs	
DatacliQ	CAN (port 1, 2, autobaud), ISO11992, J1708
Bluetooth	2.1 and 4.0 LE
Fuel level (if not present on CAN bus)	Fuel Level Sensor
Driver awareness	Driver Awareness Panel (DAP)
Power Output Module	6 high side drivers

ANALOGUE INPUTS	
Hardwired	2
Input level	0 - 30 VDS, resolution 1 mV
Sample rate	10 ms

IGNITION LINE	
Active on	Yellow wire, or DCF, or extension board control

APPLICATIONS	
Vehicle performance	Fuel consumption, odo meter, engine temperature and engine hours etcetera
Driver performance	Accelerator and brake pedal usage, vehicle speed, cruise control usage etcetera
Tacho live	Live tachograph information
RTD	Remote Tachograph Download
RDT	Tachograph Remaining Driving Time
EDR	Squarell Event Data Recorder (SQ-EDR)
TTS	Squarell Advanced Tell-tales Solution

# REMOTE properties

LEDS	
Modem	Slow on no connection, faster on connection, continue on connection with server
GNSS	Flash on no GNSS, continue on GNSS signal
DCF	Red: wrong DCF. Green/short red: 1 CAN port not connected. Green: OK

POWER	
Input voltage range	10 - 30 VDC (power, ground)
Ignition line	Yes
Electrical isolation	No
Power consumption	1.2 W average normal operation (49 mA at 24 VDC, 98 mA at 12 VDC)
Sleep & deep sleep	150 mW in ultra sleep mode (6 mA at 24 VDC, 12 mA at 12 VDC)
Ultracapacitors 2.7 V 12 F	3 mAh - For shutdown and last resort call
Backup battery (optional)	1, 2, 3x 2600mAh (20 days heartbeat per cel)

REAL TIME CLOCK (RTC)	
RTC	included battery
Time synchronisation	Google NTP

EXTENSION BOARD	
Relay	Optional
Bluetooth 2.1	Optional
Wifi	Optional
1-wire	Optional
RS-232 port	Optional
Customers request HW	Optional

CERTIFICATION	
Regulations	E4, CE, UKCA, RoHS
Data protection certificates	Optional

PHYSICAL CHARACTERISTICS	
Dimensions	100 x 100 x 20 mm
Weight	130 g
Material	PC-ABS
Flammability rating	UL 94 V-0
Operating temperature range	-40 to 70 °C
Storage temperature range	-40 to 85 °C
Operating humidity range	10 - 90% (non-condensing)
Ingress Protection Rating	IP40
Designed and produced	In the Netherlands
Tie-wrap mounting slots	2

SUPPORT	
Product info	Scan QR code
Diagnostic and upload program	iControl
Micro-B USB port	Support software
Firmware Over The Air (FOTA)	From Squarell server
Reusable for other vehicles	Yes
Reset button	Yes
Warranty	24 months

BASIC SET	
Recommended	REMOTE, CANcliQ, power cable and GNSS antenna



Squarell Technology  
Delfweg 48 | 2211 VN Noordwijkerhout | The Netherlands  
T +31 (0)252 42 03 11 | E sales@squarell.com | squarell.com